

# overlander

## fibre bonded giant tile

burmatex®

### technical specifications

Product Name	Overlander Giant Tile
Product Description	Fibre Bonded
Pile Description	85% Polypropylene 15% Nylon
Tile Dimensions	100cm x 200cm (also available in 50cm x 50cm)
Pile Weight	850g/m <sup>2</sup>
Total Weight	4200g/m <sup>2</sup>
Total Thickness	7.8mm
Backing Description	Accummen™, 75% recycled
Wear Classification	BS EN 13297 Heavy Commercial Use Class 33
Luxury Rating Class	LC2
Flammability	Euroclass Bfl-s1
Castor Chair Rating	BS EN 985 Pass - suitable for continuous use
Body Voltage Test	BS ISO 6356:2000 <2kV
Colour Fastness To Light	BS EN ISO 105 - B02 Minimum Grade 6
Colour Fastness To Shampoo	BS 1006:UK-TB: 1990 Minimum Grade 4-5

For best results we recommend





**Overlander**, giant-sized tiles are the ideal solution for converting your sports hall and gym floors into a multi-purpose surface for events such as, concerts, fund raisers, conventions, exhibitions, fashion shows and many other types of events.

Your expensive sports floor finishes are protected, whilst allowing your floor to also generate an additional income stream.

Fast to install / uplift and easy to handle - Loose-lay, no adhesive required.

**Overlander** is subject to a minimum order quantity of 500m<sup>2</sup> (plus overage). Other colours are available, please refer to our 4200 Cordiale range colour palette. For more information, please contact your local **burmatex**® sales office.



Environmental Product Declaration by independent third-party verification of the declaration and data, according to ISO 14025:2006



Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling - on a scale from A+ (very low-emission) to C (high-emission)

### environmental information

- burmatex® products are EPD verified by an independent third-party verification of the declaration and data, according to ISO 14025:2006. For specific ratings, please refer to [www.environdec.com](http://www.environdec.com)
- burmatex® products qualify for SKA as they achieve one or more requested criteria
- burmatex® products can contribute to the WELL Building Standard™, which focuses on the people and healthy workspaces
- All burmatex® carpet/carpet tile/carpet plank ranges are made at its single UK manufacturing site
- Wherever possible, raw materials including yarn/fibre are sourced locally i.e. within 20 miles
- Over 75% of burmatex® Accummen™ backing comes from recycled materials
- Continuous assessment and improvement of manufacturing process to minimise use of raw materials/power
- All manufacturing waste is recycled and all electricity used is from renewable resources
- All burmatex® products are heavy contract with a 10 year guarantee for maximum useful life
- Certified, Class A+: very-low VOC Emission

**LEED® v4** - Burmatex products can contribute towards satisfying the following credits for LEED v4: NC-v4/CI-v4 MRC2/MRC3 (Building product disclosure and optimization - environmental product declarations), MRC3/MRC4 (Building product disclosure and optimization - sourcing of raw materials), EQc1 (Enhanced indoor air quality strategies), EQc2 (Low-emitting materials), EQc6 (Interior lighting - Option 2. Lighting quality (E - H)) and EQc9 (Acoustic Performance). Products are not reviewed under LEED. LEED credit requirements cover the performance of materials in aggregate, not the performance of individual products or brands. For more information on LEED, visit [www.usgbc.org/contact](http://www.usgbc.org/contact)

Burmatex Ltd  
Victoria Mills, The Green  
Ossett, West Yorkshire  
WF5 OAN  
United Kingdom

T +44 (0) 1924 262 525  
F +44 (0) 1924 280 033  
UK email: [projects@burmatex.co.uk](mailto:projects@burmatex.co.uk)  
International email: [international@burmatex.co.uk](mailto:international@burmatex.co.uk)  
[www.burmatex.co.uk](http://www.burmatex.co.uk)

Burmatex reserves the right to improve the specification of all products without prior notification. E&OE  
Burmatex carpets and carpet tiles should be installed and used in full accordance with instructions at [www.burmatex.co.uk](http://www.burmatex.co.uk) and recognised trade standards.  
Orders are subject to Burmatex terms and conditions of sale.  
See: [www.burmatex.co.uk](http://www.burmatex.co.uk)

## LRV values for **overlander**

<b>Product code</b>	<b>Product colour name</b>	<b>CIE Y</b>	<b>CIE L</b>
19401	blackbird	1.59	13.18
19402	coal	3.33	21.31
19405	steel	8.73	35.47
19411	navy	3.30	21.2
19417	oasis	5.21	27.33
19434	savannah	12.14	41.43
19443	blush	3.87	23.25
19451	rouge	4.03	23.78



19401 blackbird



19411 navy




19402 coal



19417 oasis



19405 steel

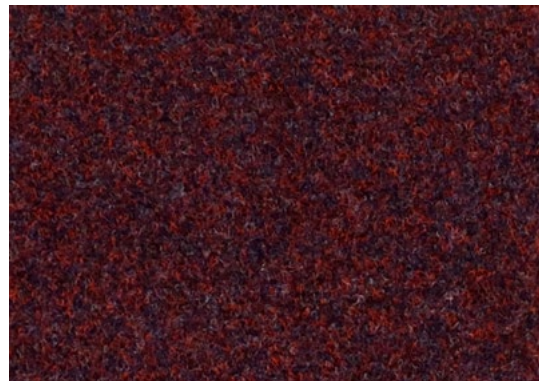

19443 blush



19434 savannah



19451 rouge